


CAT3 ISDN 50 PORT TELEPHONE PATCH PANELS

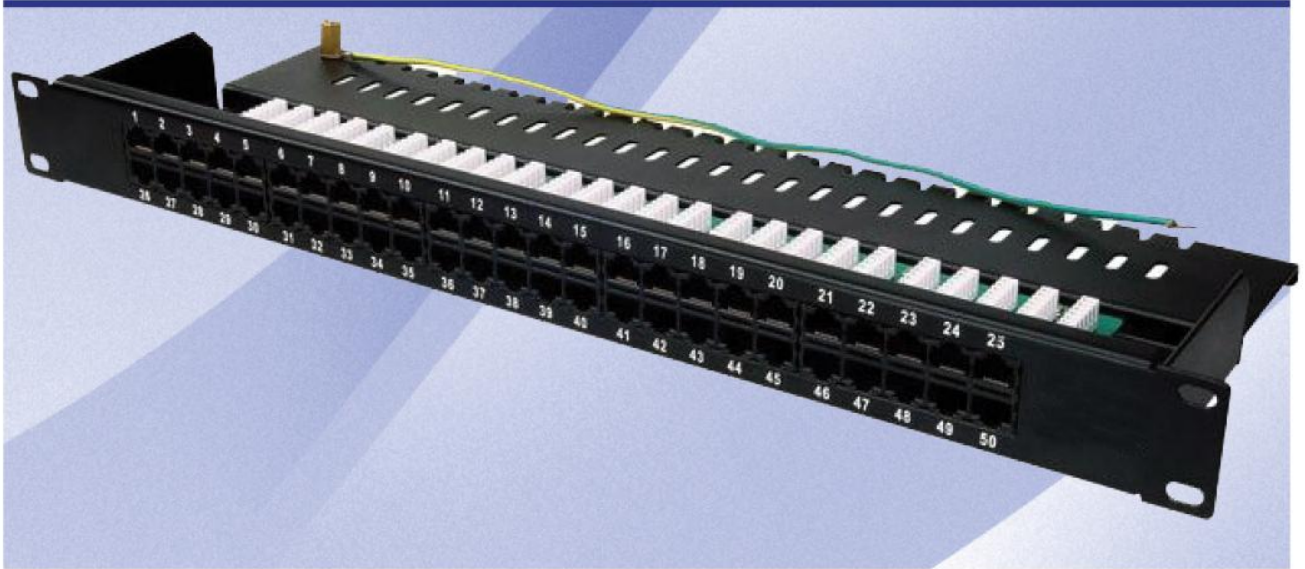

The Cat.3 / ISDN telephone patch panel is a high-density telecommunication panel with 50 Standard RJ-45 Jacks. Print circuit board together with high quality components ensures the Cat.3 performance. All ports are numbered. It offers a simple and economical way to connect the telephone system or the telephone backbone. The panel is available in 1U height.

FEATURES

- » Meeting the ANSI/TIA-568-C.2 Category 3, ISO/IEC 11801 and EN50173-1 specification.
- » Supports T568 A&B wiring & easy installation.
- » IDC connector can accept 23-26 AWG solid and stranded cables.
- » Industry standard tools like (110 or Krone punch down tools).
- » Wire manage hole for easy to manage wires with cable ties.
- » RoHs Compliant

ELECTRICAL & PHYSICAL SPECIFICATIONS

- » IDC Contact: 0.8mm thickness Phosphor Bronze, tin plating over nickel
- » Jack Operating life : minimum 750 insertions
- » High impact plastic housing, UL 94V-0
- » Jack Contact : Phosphor Bronze, 50µinch thickness gold plated over nickel
- » IDC Operating life : minimum 200 insertions
- » PCB : FR-4, 1.6mm thickness
- » Dielectric Strength : 1000V RMS for 1min
- » Insulation Resistance : 10MΩ min
- » Contact Resistance : 2mΩ per contact
- » Temperature Range : -10 C to 60 C max
- » Humidity : 10%-65%

APPLICATION

- » 10BASE-TX Ethernet
- » Voice, Video and other applications.

Art No

Product Description

FO-SP-3005-50PC3L

1U 50 Port UTP Cat3 ISDN Patchpanel

